techoLED

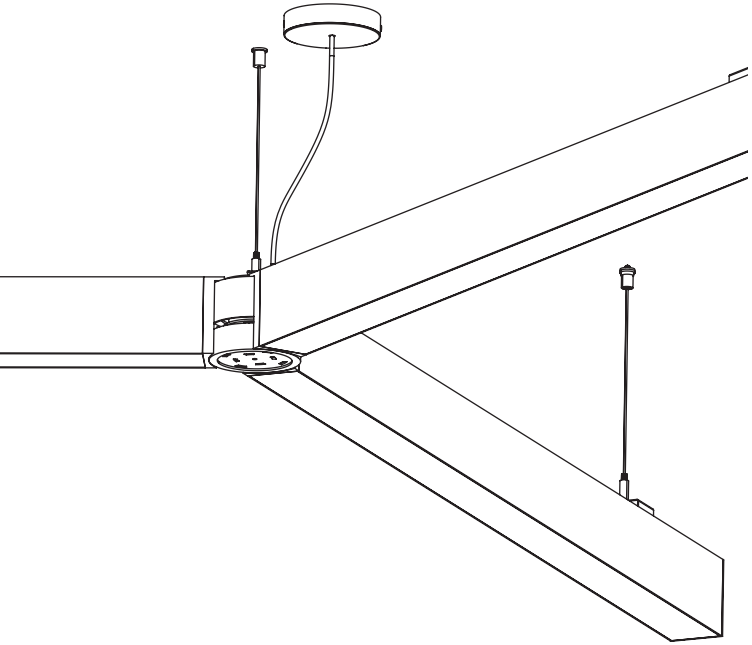

INSTALLATION AND ASSEMBLY INSTRUCTIONS

BX-M

WARNING: Failure to follow instructions could result in damage to product and void warranties!
WARNING: Risk of fire or electrical shock. Disconnect power before installing or servicing.
WARNING: Verify the existing input voltage and ensure it matches input rating on luminaire's product label, located on inside of access cover.
WARNING: Before proceeding, read all instructions carefully to ensure proper and safe installation.
IMPORTANT: This product must be installed in accordance with the applicable installation code by a licensed electrician, familiar with the construction and operation of the product and the hazards involved.

PENDANT

PENDANT:

1. CANOPY WITH AC INPUT 2. PENDANT HARDWARE 3. END CAP 4. BX-MA4 CONNECTOR

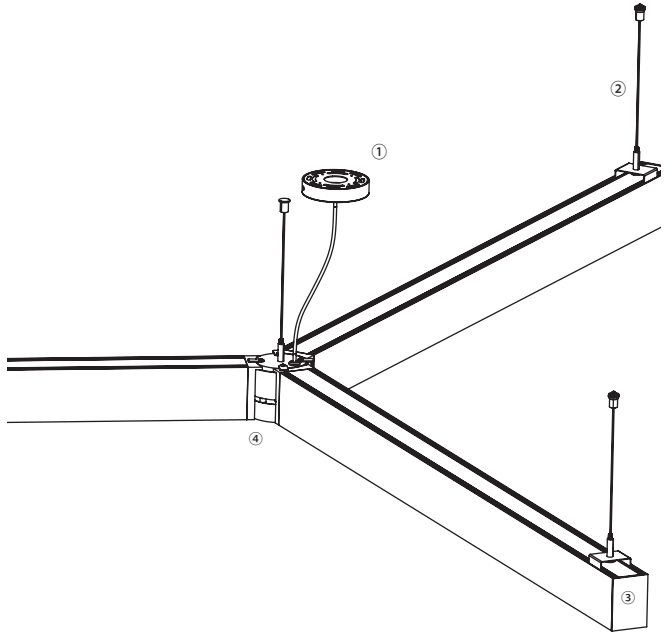

1. Remove bottom cover

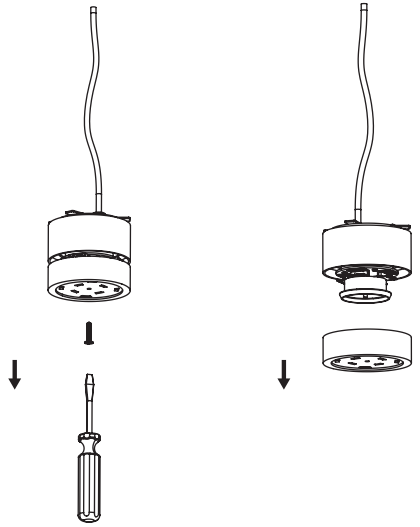

If you have questions or concerns, please reach out to TechoLED at 212-876-5373 or info@techoled.com we are here to help!

PENDANT

2. Connect fixture to BX-MA4 connector

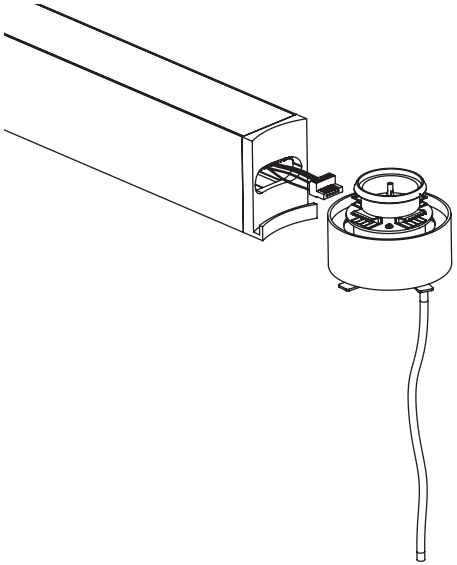

3. Secure BX-MA4 connector using clips on top

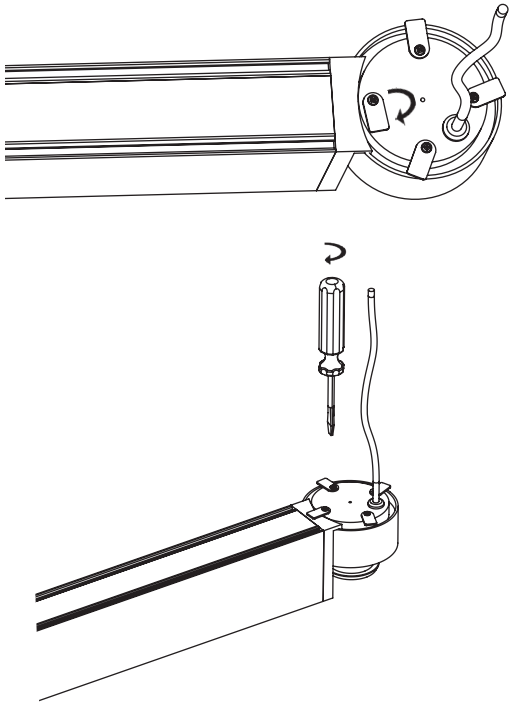

PENDANT

4. Repeat step 2 an 3 until you reach the desired shape - min angle 75deg

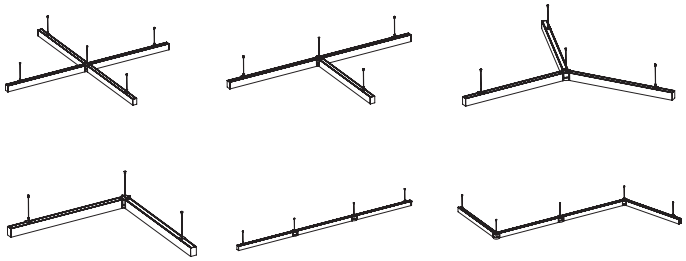

5. Insert cover back to BX-MA4 connector

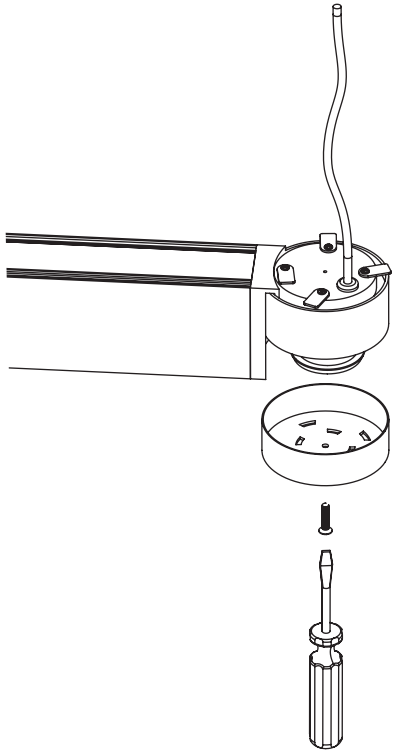

PENDANT
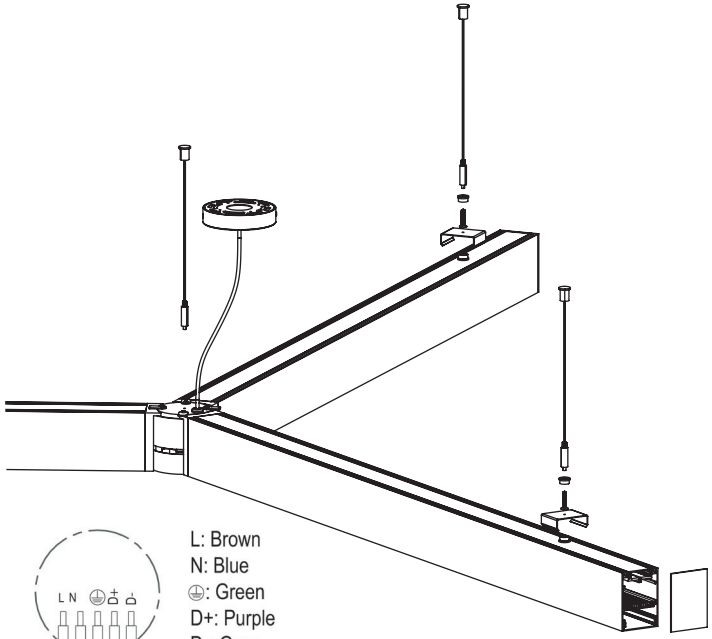
6. Install canopy bracket to J box using screws
7. Attach power canopy plate to canopy bracket using screws
8. Install Fixture clip anchor to clip using nut
9. Snap Clip into fixture
10. For non power canopy, attach wire directly to ceiling
11. Connect power to driver according to wiring diagram.