

Project:	Type:
	Comments:



Highlights


The TechoLED BX series features specification-grade linear LED fixtures made from high-grade aluminum extrusions. Available in standard sizes from 2 to 8 feet, as well as custom lengths, these fixtures can be pendant, surface, or wall-mounted. With virtually limitless options for creating patterns and shapes, the BX series provides a versatile, cost-effective, and modern lighting solution.

LED: Samsung LED chips, 2700-5000K, tunable white and RGB/RGBW available, 90CRI, 50,000 hour rated lifespan. Custom lumen packages available.


Optical: Direct illumination, multiple beam angles available, UGR<16

Construction: Damp location listed, high grade aluminum extrusion, die cast end caps, PMMA diffuser, powder coat finish. X, T, L lit corners, wall to ceiling transitions, for smooth seamless patterns.

Cross Section



Installation

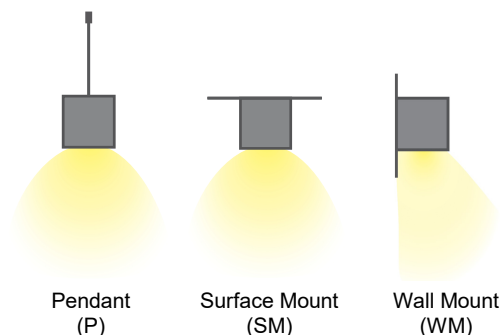

Project:	Type:
	Comments:

Configuration Example

Model #	Distribution	Length	Lumen Output	Color Temp.	Voltage	Color
TECHOLED-BX-3RS-D-2-ME-27-U-W	Direct	2'	Medium	2700K	110-277V	White

Ordering Guide:

Select one option from each group below. For a custom preference please contact sales@techoled.com

1-FIXTURE ID		2-DISTRIBUTION		3-LENGTH		4-LUMEN OUTPUT	
BX-3RS	BX-3RS	D	Direct	2	2'	ME	Medium
				4	4'		
				6	6'		
				8	8'		
				C	Custom		
5-COLOR TEMP.		6-BEAM ANGLE		7-VOLTAGE		8-FINISH	
27	2700K	15	15°	U	110-277V	B	Black
30	3000K	35	35°	HV	347V	C	Custom (RAL#)
35	3500K	45	45°			S	Silver
40	4000K					W	White
50	5000K						
DT	Lutron T-series						
RGB	RGB						
D	Tunable White						
9-MOUNTING		10-DRIVER OPTIONS		11-OPTIONS		12-OPTIONS (CONT.)	
P	Pendant	DM	0-10V Dimming	RF-D	Remote Tunable (RF only)	EM	EM Battery (remote)
SM	Surface Mount	2C	2 Channel	RF-R	Remote RGB/W (RF only)	X	None
W	Wall Mount	DM1%	1% Dimming	M	Motion Sensor (remote)		
		LT1	LDE1 Lutron 1%	BM	BubblyNet BT Mesh		
		DA	Dali	CS	Casambi		
		DMX	DMX	AWN	Lutron Athena Node		
		TR	Triac Dimming	AWNS	Lutron Athena Node sensor		
		RF	RF Wireless	NL-ES7	nLight - Wired		
		X	None	NL-AIR	nLight - AIR		
				NL-M	nLight - Module only		
				X	None		

Project:	Type:
	Comments:

Lumen Output Details

Model #	Size	Color Temp.	Wattage	Lumen Output	Lumens / ft	Light Source
TECHOLED-BX-3RS-D-2-ME-30	2'	3000K	15W	1425Lm	713	5 spots
TECHOLED-BX-3RS-D-4-ME-30	4'	3000K	18W	1710Lm	428	6 spots
TECHOLED-BX-3RS-D-6-ME-30	6'	3000K	24W	2280Lm	380	8 spots
TECHOLED-BX-3RS-D-8-ME-30	8'	3000K	30W	2850Lm	356	10 spots

Performance above applies to 90 CRI, 3000K. Calculate 96% for 2700K, 104% for 3500K and 109% for 4000K

Performance

Output	Lumens / W	Direct W / ft	Lumens / ft
Medium	95	3.8	3

Project:	Type:
	Comments:

Driver Option Details


Code	Description
LT1	LDE1 -Lutron Hi-lume 1% EcoSystem, Soft-on, Fade-to Black Dimming
DA	DALI
DMX	DMX - Decoder provided by TechoLED, controller by others

Controls Details

Code	Description
RF-D	RF Wireless remote controller for tunable white. Default for tunable white.
RF-R	RF Wireless remote controller for RGB & RGBW. Default for RGB & RGBW.
M	Motion Sensor - remote, for integral sensor consult factory
BM	Bluetooth Mesh Smart Wireless Control by BubblyNet
CS	Bluetooth Mesh Smart Wireless Control by Casambi
AWNR	Lutron Athena wireless node
AWNS	Lutron Athena wireless node with sensor
NL-ES7	Acuity nLight – Wired nES7 sensor
NL-AIR	Acuity nLight – AIR wireless rES7 sensor
NL-M	Acuity nLight - ready, sensor by others

Project:	Type:
	Comments:



Dimension and Mounting - Direct Distribution (D)

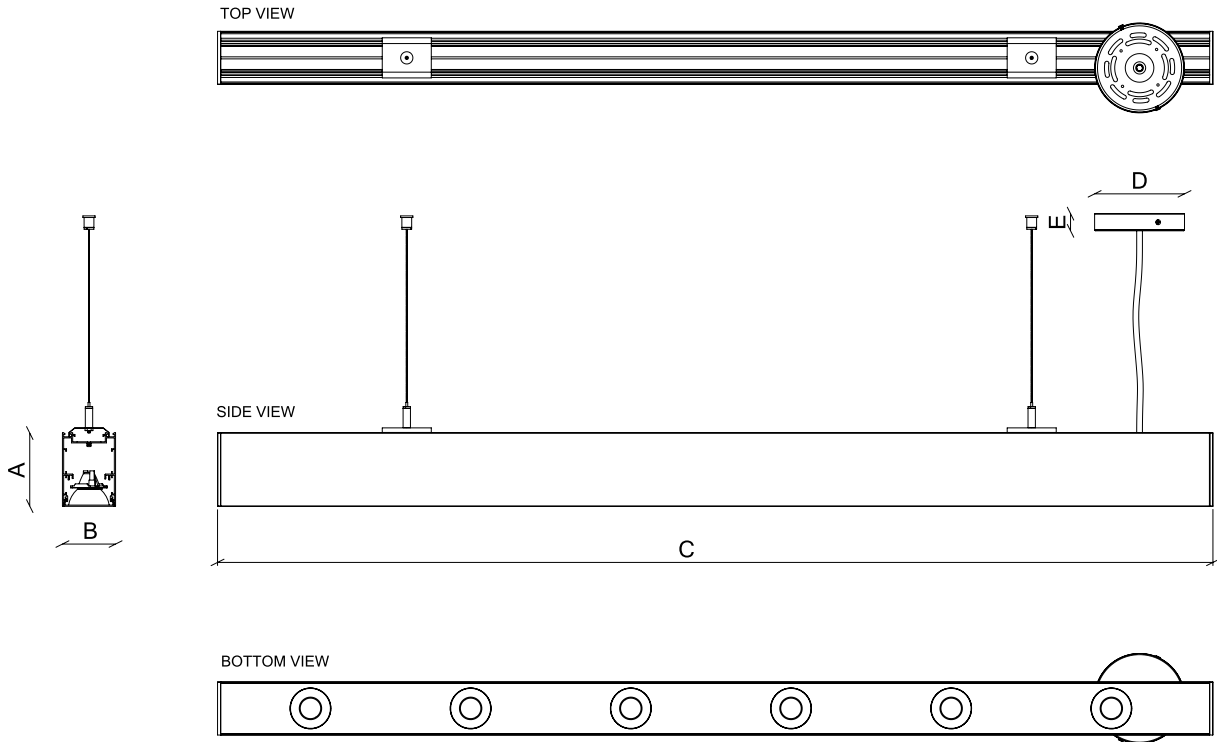


FIXTURE ID	A	B	C	D	E
BX-3RS-D-2	3.5"	2.6"	24.2"	4.33"	0.98"
BX-3RS-D-4	3.5"	2.6"	48"	4.33"	0.98"
BX-3RS-D-6	3.5"	2.6"	71.8"	4.33"	0.98"
BX-3RS-D-8	3.5"	2.6"	95.5"	4.33"	0.98"

Project:	Type:
	Comments:



Pendant Mount (D)

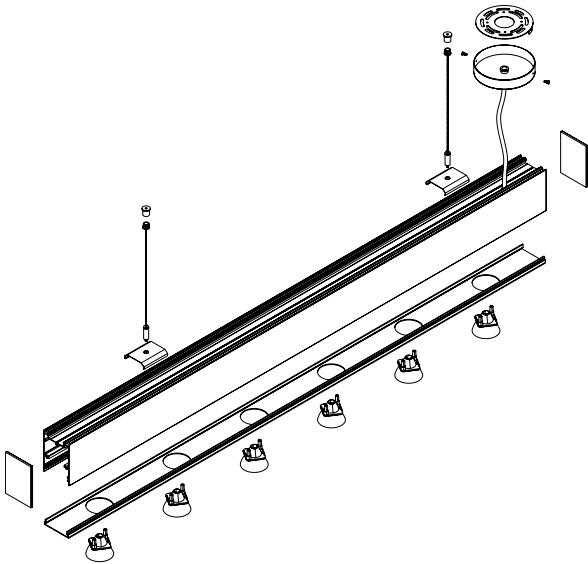


Pendant Kit



Surface Mount (D)

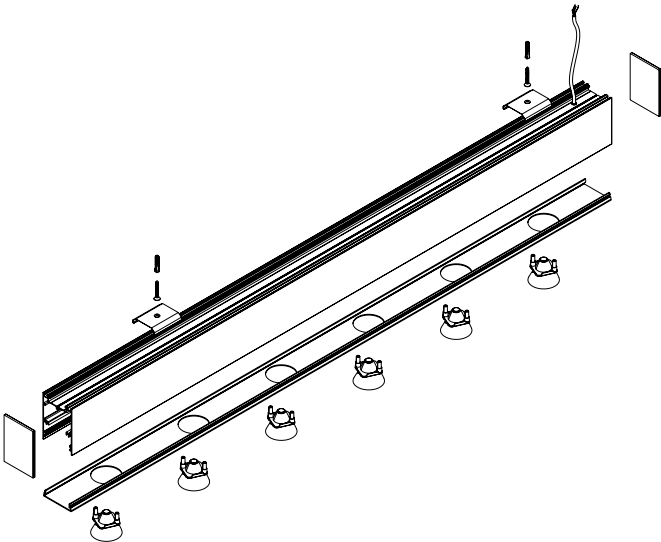


Surface Mount Kit




Project:	Type:
	Comments:

■ Wall Mount (D)

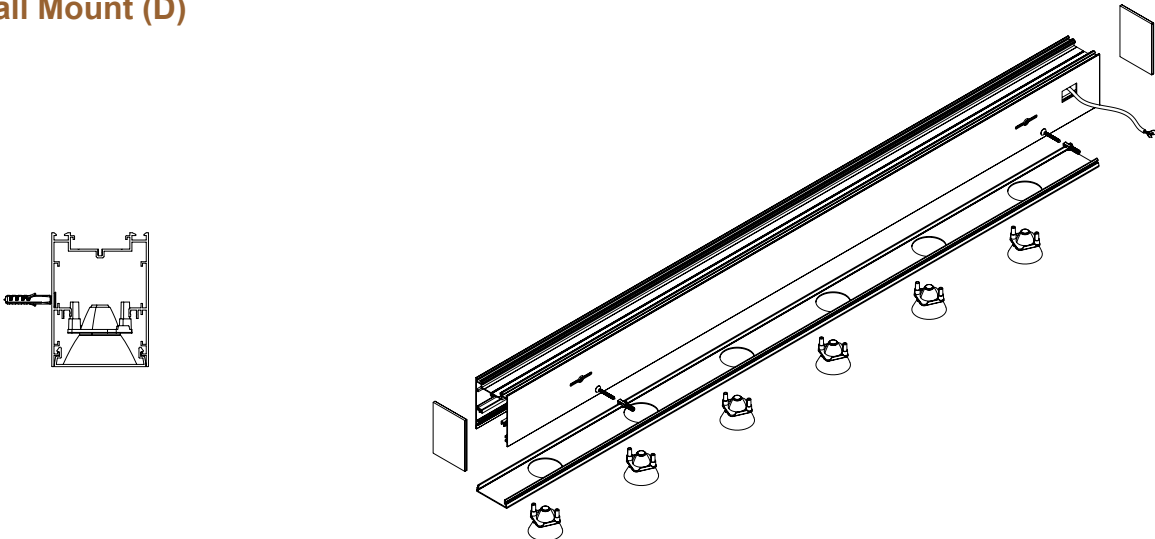


■ Wall Mount Kit




Project:	Type:
	Comments:

Connectors

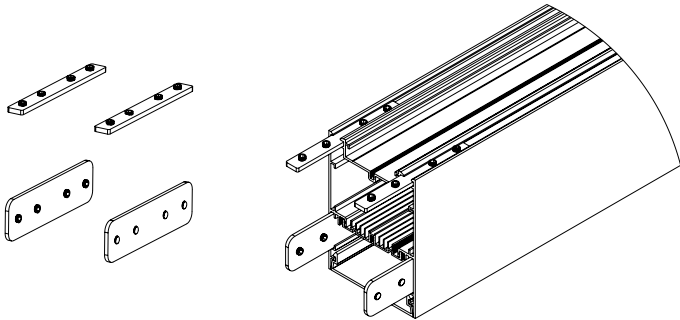


Configurations

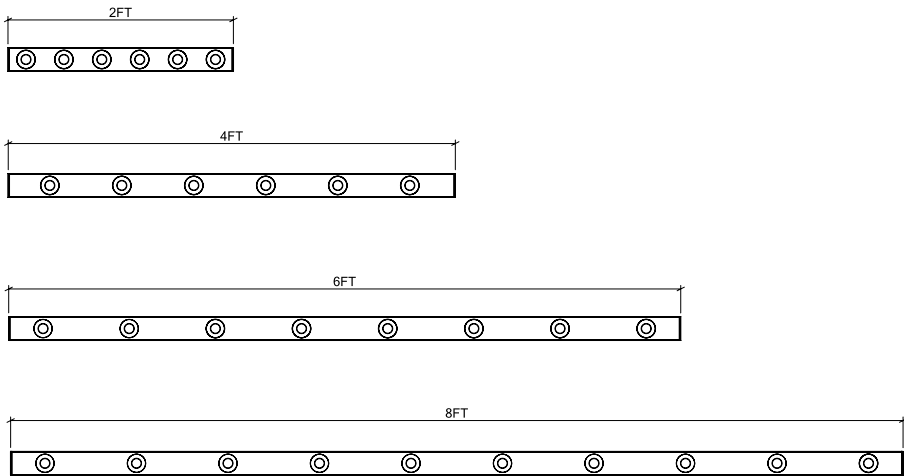


Project:	Type:
	Comments:


Photometrics

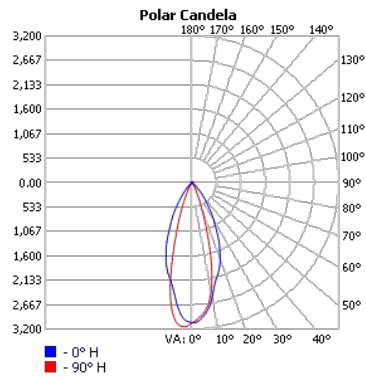


TECHOLED-BX-3RS-D-2-ME-30

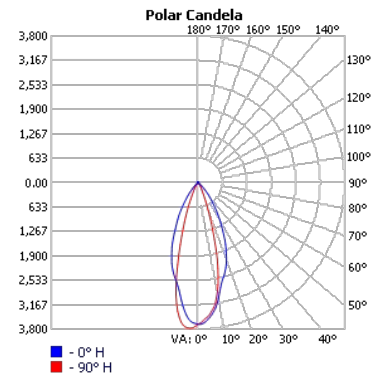

TECHOLED-BX-3RS-D-4-ME-30

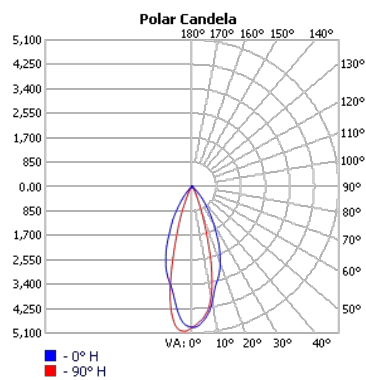


TECHOLED-BX-3RS-D-6-ME-30

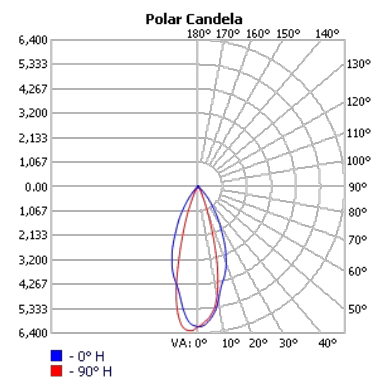


TECHOLED-BX-3RS-D-8-ME-30

Project:	Type:
	Comments:


 Patterns Option Examples

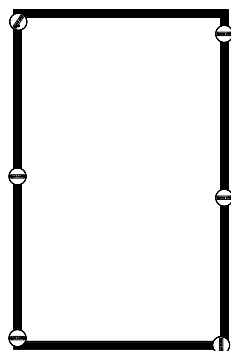

Rectangle

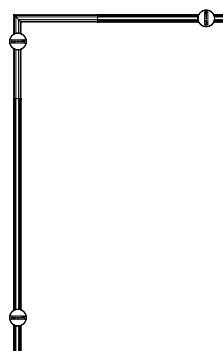

L-Shape

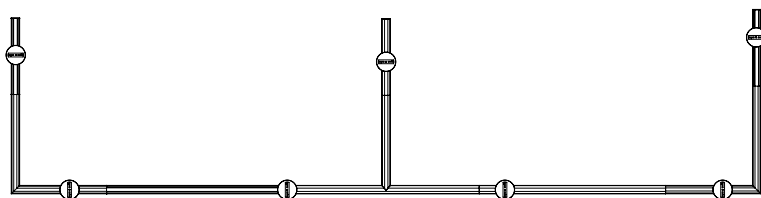


Custom

Project:	Type:
	Comments:

Finish Details (powder coat finish)

Standard Colors



W – White



S – Silver



B – Black

Custom Colors



RAL 1003



RAL 2004



RAL 3000



RAL 4001



RAL 5002



RAL 6000



RAL 6038



RAL 7001



RAL 1036



RAL 8029

Any RAL color available, please refer to ralcolorchart.com


Custom Wooden Colors



American Walnut



Cherry



Maple



Light Oak




Palisander Santos

Project:	Type:
	Comments:

Color Temperature

Color Temperature

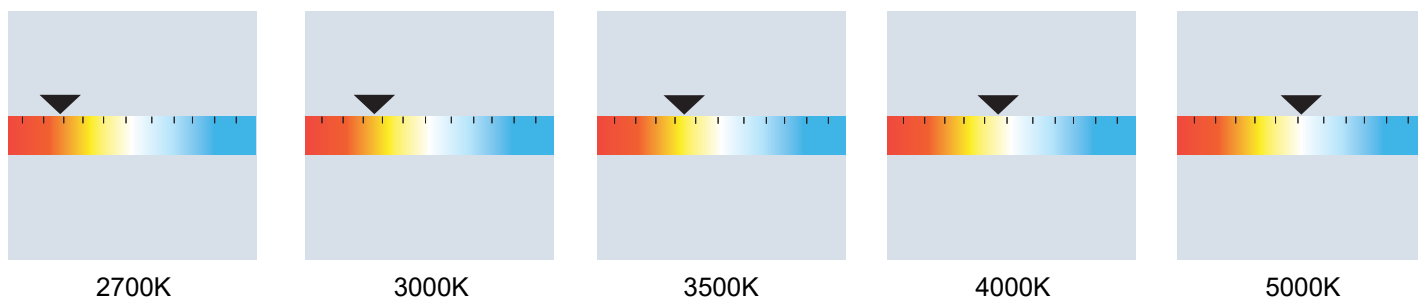

Tunable White

