


Project:	Type:
	Comments:

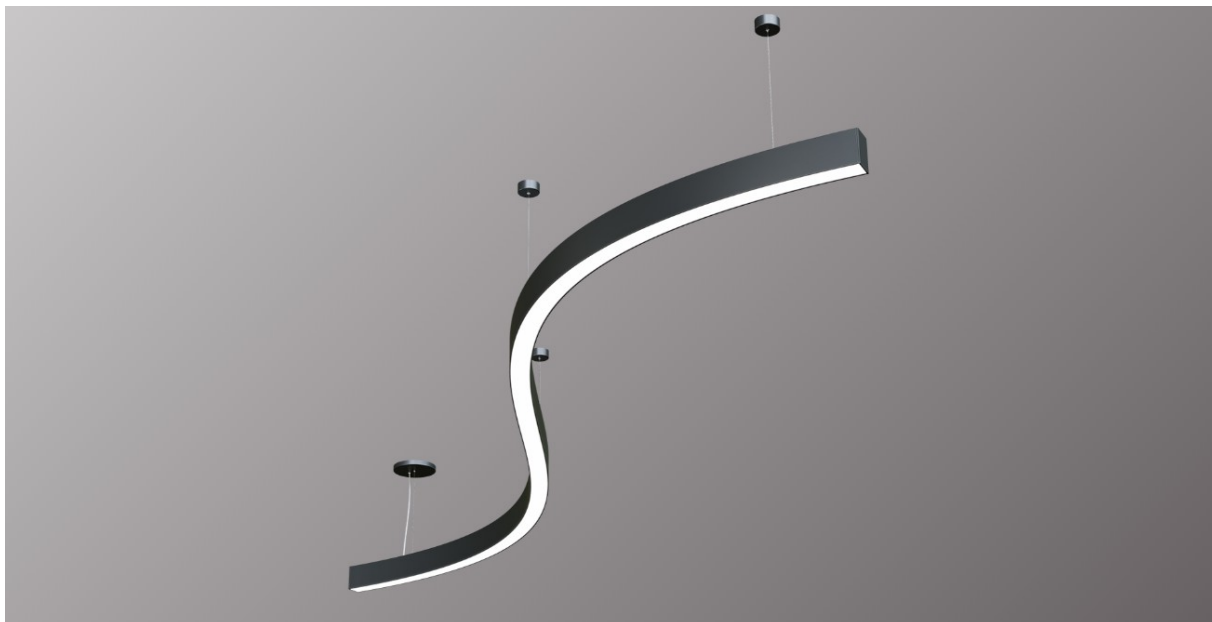

Highlights


The Techoled BX series features specification-grade linear LED fixtures made from high-grade aluminum extrusions. Available in standard sizes from 2 to 8 feet, as well as custom lengths, these fixtures can be pendant, surface, or wall-mounted. With virtually limitless options for creating patterns and shapes, the BX series provides a versatile, cost-effective, and modern lighting solution.

LED: Samsung LED chips, 2700-5000K, tunable white and RGB/RGBW available, 90CRI, 50,000 hour rated lifespan. Custom lumen packages available.


Optical: Direct and direct/indirect illumination, 110° beam angle, UGR<19

Construction: Damp location listed, high grade aluminum extrusion, die cast end caps, PMMA diffuser, powder coat finish. X, T, L lit corners, wall to ceiling transitions, for smooth seamless patterns.

Cross Section

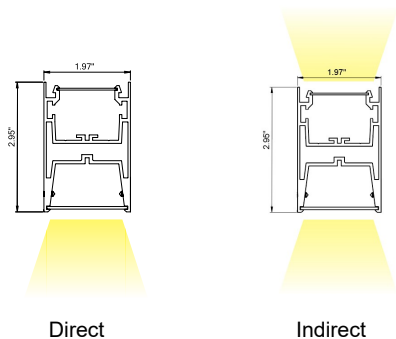

Installation



Project:	Type:
	Comments:

Configuration Example

Model #	Distribution	Length	Lumen Output	Color Temp.	Voltage	Color
TECHOLED-BX-CURV-D-C-ME-27-U-W	Direct	Custom	Medium	2700K	110-277V	White

Ordering Guide:

Select one option from each group below. For a custom preference please contact sales@techoled.com

1-FIXTURE ID	2-DISTRIBUTION	3-LENGTH	4-LUMEN OUTPUT
BX-CURV	D Direct DI Direct/Indirect DI2 D/I2-circuit	C Custom	LO Low ME Medium HI High
5-COLOR TEMP.	6-VOLTAGE	7-FINISH	8-MOUNTING
27 2700K 30 3000K 35 3500K 40 4000K 50 5000K DT Lutron T-series RGB RGB RGBW RGBW D Tunable White	U 110-277V HV 347V	W White S Silver B Black C Custom (RAL#)	P Pendant SM Surface Mount
9-DRIVER OPTIONS	10-OPTIONS	11-OPTIONS (CONT.)	
DM 0-10V Dimming 2C 2 Channel DM1% 1% Dimming LT1 LDE1 Lutron 1% DA Dali DMX DMX TR Triac Dimming RF RF Wireless X None	RF-D Remote Tunable (RF only) RF-R Remote RGB/W (RF only) M Motion Sensor (remote) BM BubblyNet BT Mesh CS Casambi AWNR Lutron Athena Node AWNS Lutron Athena Node sensor NL-ES7 nLight - Wired NL-AIR nLight - AIR NL-M nLight - Module only X None	EM EM Battery (remote) X None	

Project:	Type:
	Comments:

Lumen Output Details

Direct Distribution

Model #	Distribution	Length	Output	Color Temp.	Lumens / W	W / ft	Lumens / ft
TECHOLED-BX-CURV-D-C-LO-30	Direct	Custom	Low	3000K	100	6	600
TECHOLED-BX-CURV-D-C-ME-30	Direct	Custom	Medium	3000K	100	10	1000
TECHOLED-BX-CURV-D-C-HI-30	Direct	Custom	High	3000K	105	15	1500

Direct / Indirect Distribution

Model #	Distribution	Length	Output	Color Temp.	Lumens / W	W / ft	Direct/Indirect	Indirect
							Lumens / ft	Lumens / ft
TECHOLED-BX-CURV-DI-C-LO-30	Direct/Indirect	Custom	Low	3000K	100	9	600	300
TECHOLED-BX-CURV-DI-C-ME-30	Direct/Indirect	Custom	Medium	3000K	100	13	1000	300
TECHOLED-BX-CURV-DI-C-ME-30	Direct/Indirect	Custom	High	3000K	105/100	18	1500	300

Performance above applies to 90 CRI, 3000K. Calculate 96% for 2700K, 104% for 3500K and 109% for 4000K

Project:	Type:
	Comments:

Driver Option Details

Code	Description
LT1	LDE1 -Lutron Hi-lume 1% EcoSystem, Soft-on, Fade-to Black Dimming
DA	DALI
DMX	DMX - Decoder provided by TechoLED, controller by others

Controls Details



Code	Description
RF-D	RF Wireless remote controller for tunable white. Default for tunable white.
RF-R	RF Wireless remote controller for RGB & RGBW. Default for RGB & RGBW.
M	Motion Sensor - remote, for integral sensor consult factory
BM	Bluetooth Mesh Smart Wireless Control by BubblyNet
CS	Bluetooth Mesh Smart Wireless Control by Casambi
AWNR	Lutron Athena wireless node
AWNS	Lutron Athena wireless node with sensor
NL-ES7	Acuity nLight – Wired nES7 sensor
NL-AIR	Acuity nLight – AIR wireless rES7 sensor
NL-M	Acuity nLight - ready, sensor by others

Length Details

Code	Description
C	Custom, Drawing required (consult factory)


Project:	Type:
	Comments:

Dimension and Mounting - Direct Distribution (D)

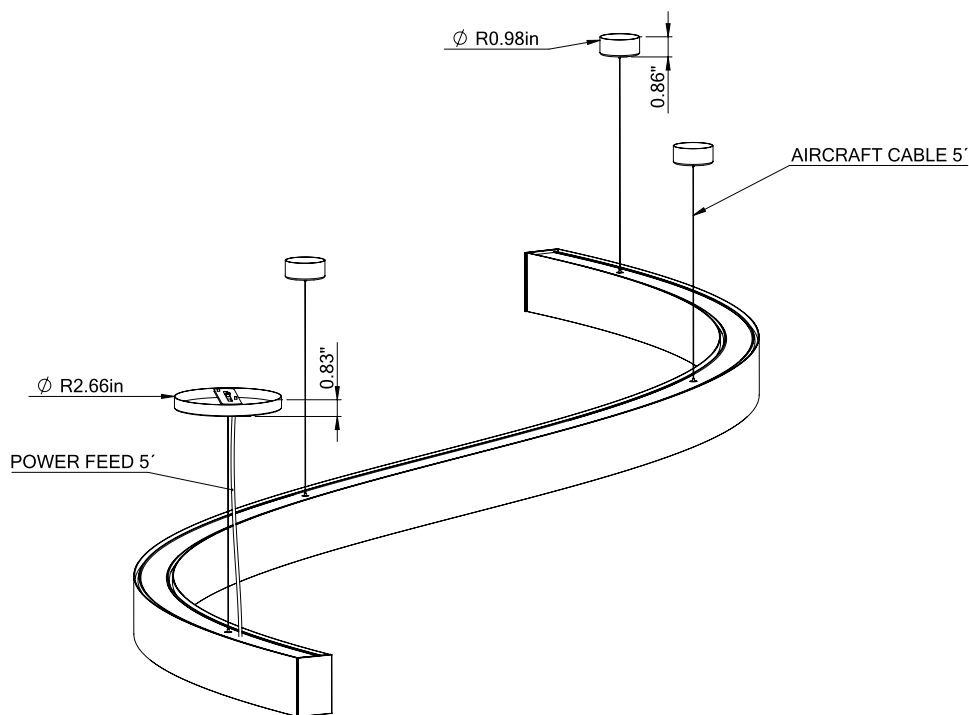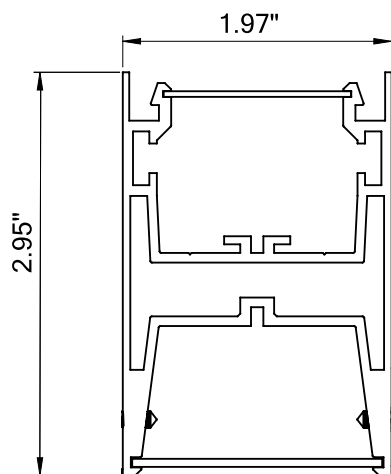

Project:	Type:
	Comments:

■ **Pendant Mounting (D)**





■ **Surface Mounting (D)**




Project:	Type:
	Comments:

Dimension and Mounting - Direct/Indirect Distribution (DI)

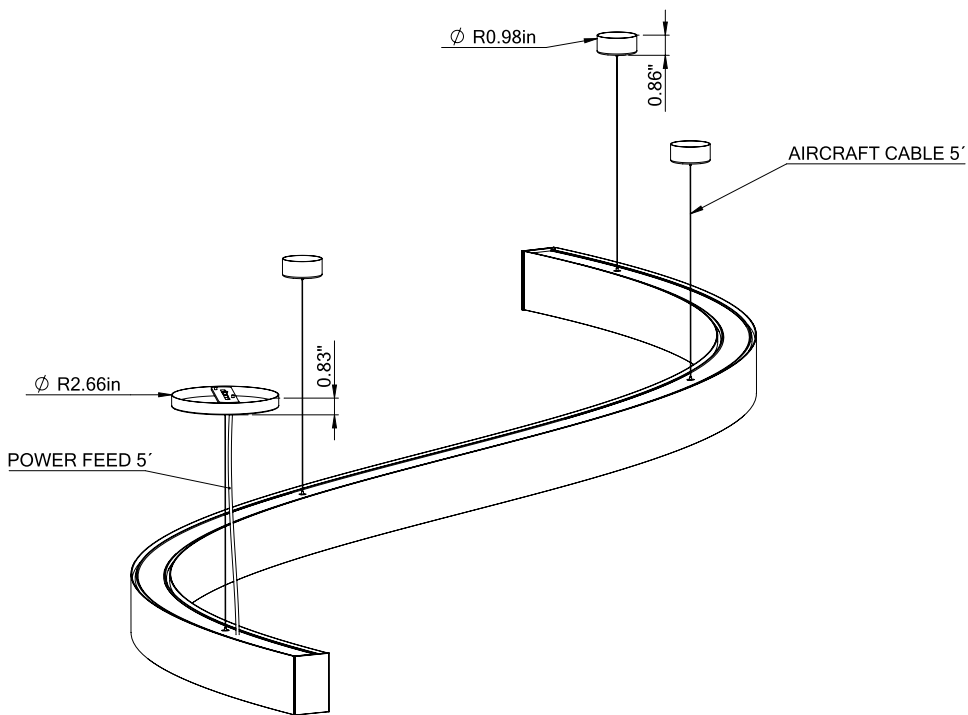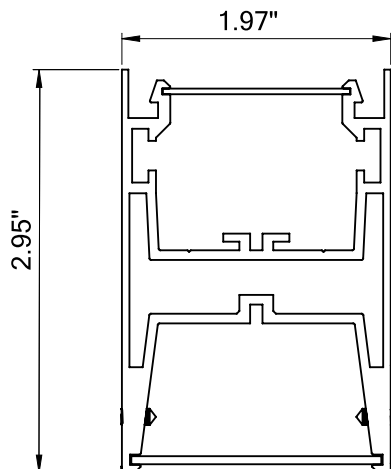


Project:	Type:
	Comments:


Photometrics




TECHOLED-BX-CURV-D-C-LO-30




TECHOLED-BX-CURV-D-C-ME-30




TECHOLED-BX-CURV-D-C-HI-30



TECHOLED-BX-CURV-DI-C-LO-30








TECHOLED-BX-CURV-DI-C-ME-30



TECHOLED-BX-CURV-DI-C-HI-30

Project:	Type:
	Comments:

Patterns Option Examples

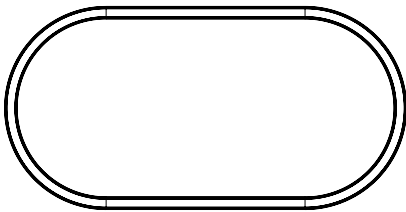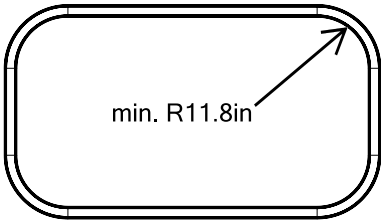

Project:	Type:
	Comments:

Applications




Project:	Type:
	Comments:

Finish Details (powder coat finish)

Standard Colors




Custom Colors

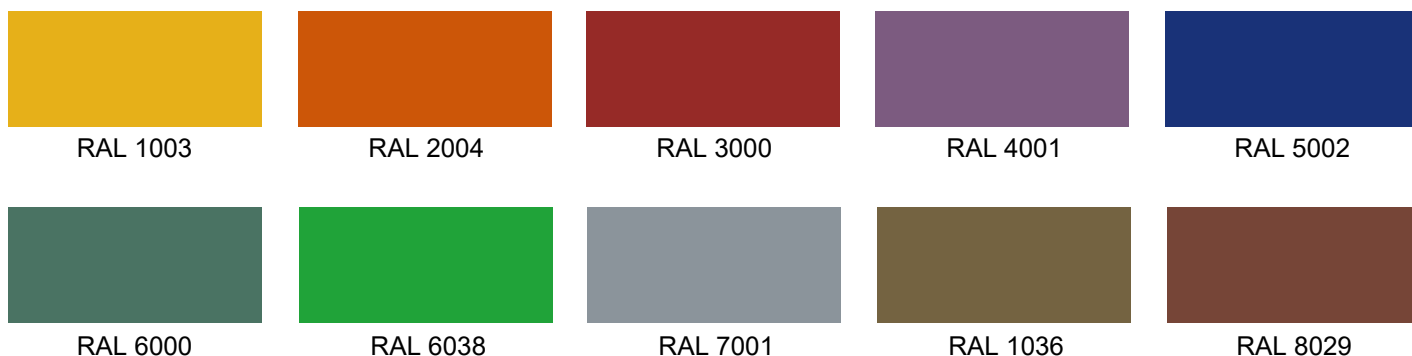

Any RAL color available, please refer to ralcolorchart.com


Custom Wooden Colors

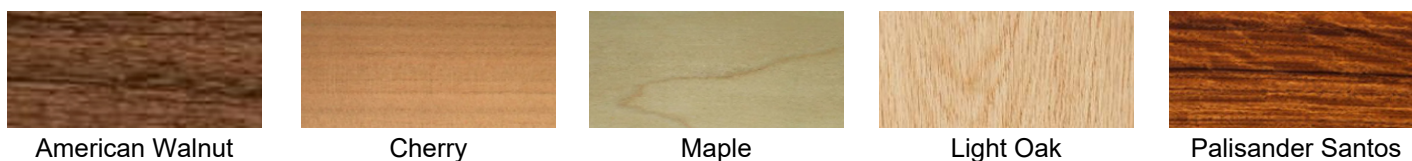

Project:	Type:
	Comments:

Color Temperature

Color Temperature

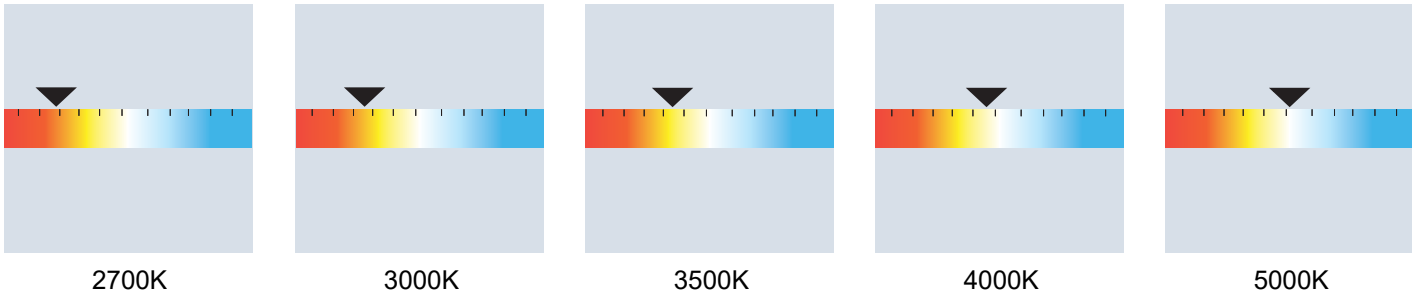

Tunable White

