

Project:	Type:
	Comments:



Highlights


The TechoLED Moon series features smooth, round LED luminaires made with high-end aluminum extrusion and a PMMA diffuser. With diameters ranging from 11.8" to 47.2" (or a custom size of your choice), direct and direct/indirect illumination, and surface-mounted or pendant installation, it offers a simple yet sleek lighting solution for any modern interior.

LED: Samsung LED chips, 2700-5000K, tunable white and RGB/RGBW available, 90CRI, 50,000 hour rated lifespan. Custom lumen packages available.

Optical: Direct/Indirect configuration, 115° Beam angle

Construction: Damp location listed. High grade aluminum extrusion, PMMA diffuser, integral driver (inside canopy in pendant version), powder coat finish, custom finishes available.

Installation



Project:	Type:
	Comments:

Configuration Example

Model #	Distribution	Diameter	Output	Color Temp.	Voltage	Finish
TECHOLED-MS-DI-18-ME-30-U-S	Direct/Indirect	18.9"	Medium	3000K	110-277V	Silver

Ordering Guide:

Select one option from each group below. For a custom preference please contact sales@techoled.com

1-FIXTURE ID		2-DISTRIBUTION		3-DIAMETER		4-WATTAGE	
MS	MS - Circle	DI	Direct/Indirect	11	11.8"	HI	High
		DI2	D/I2-circuit	15	15.7"	LO	Low
				18	18.9"	ME	Medium
				23	23.6"		
				35	35.4"		
				47	47.2"		

5-COLOR TEMP.		6-VOLTAGE		7-FINISH		8-MOUNTING	
27	2700K	U	110-277V	S	Silver	P	Pendant
30	3000K	HV	347V	W	White	SM	Surface Mount
35	3500K			B	Black		
40	4000K			C	Custom (RAL#)		
RGB	RGB						
RGBW	RGBW						
D	Tunable White						

9-DRIVER OPTIONS		10-OPTIONS		11-OPTIONS (CONT.)	
DM	0-10V Dimming	RF-D	Remote Tunable (RF only)	EM	EM Battery (remote)
2C	2 Channel	RF-R	Remote RGB/W (RF only)	X	None
DM1%	1% Dimming	M	Motion Sensor (remote)		
LT1	LDE1 Lutron 1%	BM	BubblyNet BT Mesh		
DA	Dali	CS	Casambi		
DMX	DMX	AWN	Lutron Athena Node		
TR	Triac Dimming	AWNS	Lutron Athena Node sensor		
RF	RF Wireless	NL-ES7	nLight - Wired		
X	None	NL-AIR	nLight - AIR		
		NL-M	nLight - Module only		
		X	None		

Project:	Type:
	Comments:

Lumen Output Details

Model #	Diameter	Output	Color Temp.	Wattage	Down Lumen Out.	Up Lumen Out.
TECHOLED-MS-DI-18-LO-30-U-S	18.9"	Low	3000K	40W	2125Lm	1275Lm
TECHOLED-MS-DI-18-ME-30-U-S	18.9"	Medium	3000K	50W	2550Lm	1700Lm
TECHOLED-MS-DI-18-HI-30-U-S	18.9"	High	3000K	80W	4675Lm	2125Lm
TECHOLED-MS-DI-23-LO-30-U-S	23.6"	Low	3000K	40W	2125Lm	1275Lm
TECHOLED-MS-DI-23-ME-30-U-S	23.6"	Medium	3000K	80W	4250Lm	2550Lm
TECHOLED-MS-DI-23-HI-30-U-S	23.6"	High	3000K	120W	6800Lm	3400Lm
TECHOLED-MS-DI-35-LO-30-U-S	35.4"	Low	3000K	65W	3400Lm	2125Lm
TECHOLED-MS-DI-35-ME-30-U-S	35.4"	Medium	3000K	120W	6800Lm	3400Lm
TECHOLED-MS-DI-35-HI-30-U-S	35.4"	High	3000K	150W	8500Lm	4250Lm
TECHOLED-MS-DI-47-LO-30-U-S	47.2"	Low	3000K	105W	5950Lm	2975Lm
TECHOLED-MS-DI-47-ME-30-U-S	47.2"	Medium	3000K	150W	8500Lm	4250Lm
TECHOLED-MS-DI-47-HI-30-U-S	47.2"	High	3000K	200W	11050Lm	5950Lm

Performance above applies to 90 CRI, 3000K. Calculate 96% for 2700K, 104% for 3500K and 109% for 4000K

Performance

Output	Lumens / W
Low	85
Medium	85
High	85

Project:	Type:
	Comments:

Driver Option Details

Code	Description
LT1	LDE1 - Lutron Hi-lume 1% EcoSystem, Soft-on, Fade-to Black Dimming
DA	DALI
DMX	DMX - Decoder provided by TechoLED, controller by others

Controls Details

Code	Description
RF-D	RF Wireless remote controller for tunable white. Default for tunable white.
RF-R	RF Wireless remote controller for RGB & RGBW. Default for RGB & RGBW.
M	Motion Sensor - remote, for integral sensor consult factory
BM	Bluetooth Mesh Smart Wireless Control by BubblyNet
CS	Bluetooth Mesh Smart Wireless Control by Casambi
AWNRR	Lutron Athena wireless node
AWNS	Lutron Athena wireless node with sensor
NL-ES7	Acuity nLight - Wired nES7 sensor
NL-AIR	Acuity nLight - AIR wireless rES7 sensor
NL-M	Acuity nLight - ready, sensor by others



Options (cont.) Details

Code	Description
EM	Emergency Battery Backup (remote)



Project:	Type:
	Comments:

Dimensions and Mounting (Surface Mount)



■ TECHOLED-MS-DI-18-25

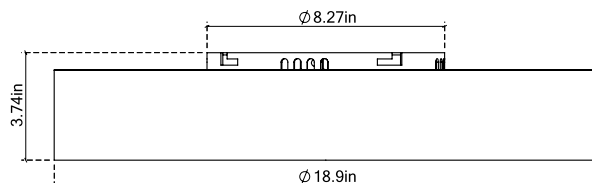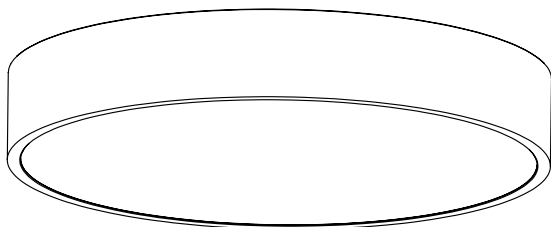


■ TECHOLED-MS-DI-23-40

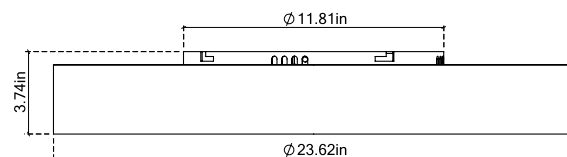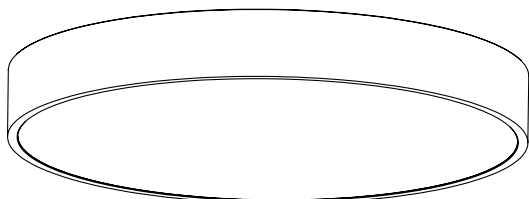

■ TECHOLED-MS-DI-35-90

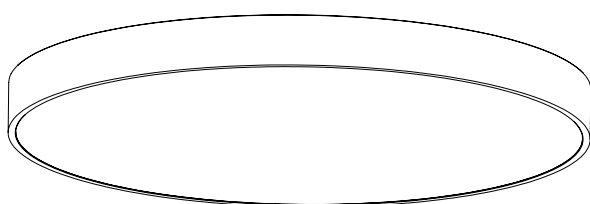



■ TECHOLED-MS-DI-47-150





Project:	Type:
	Comments:

Dimensions and Mounting (Pendant)



TECHOLED-MS-DI-11-15

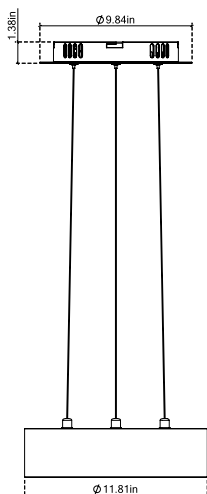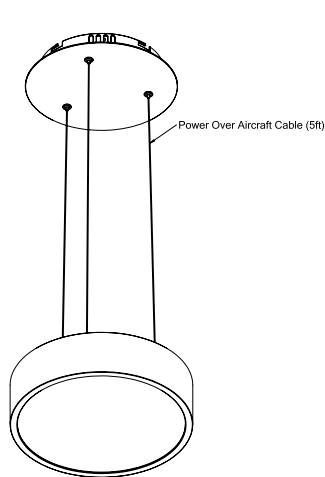



TECHOLED-MS-DI-15-20

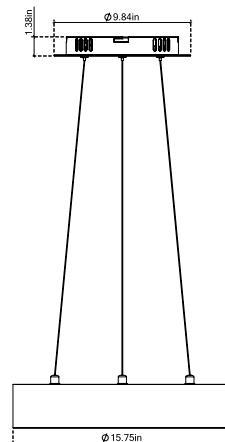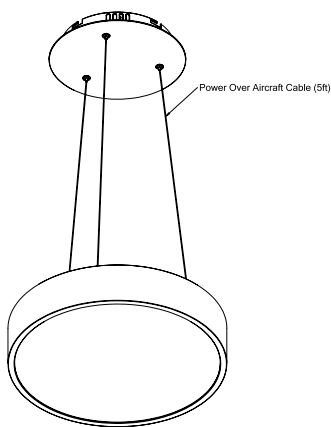

TECHOLED-MS-DI-18-25

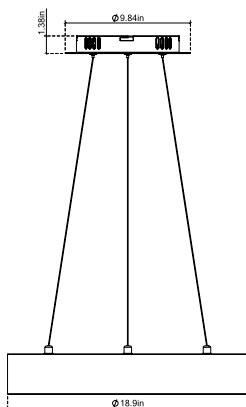
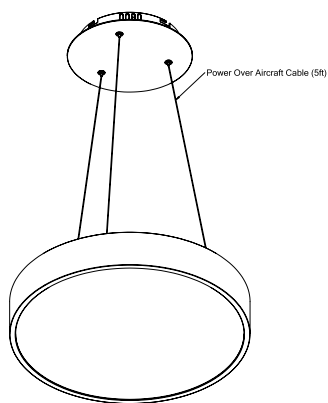


TECHOLED-MS-DI-23-40


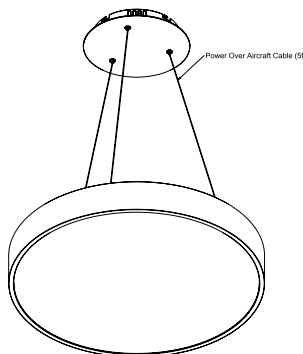


Project:	Type:
	Comments:

TECHOLED-MS-DI-35-90

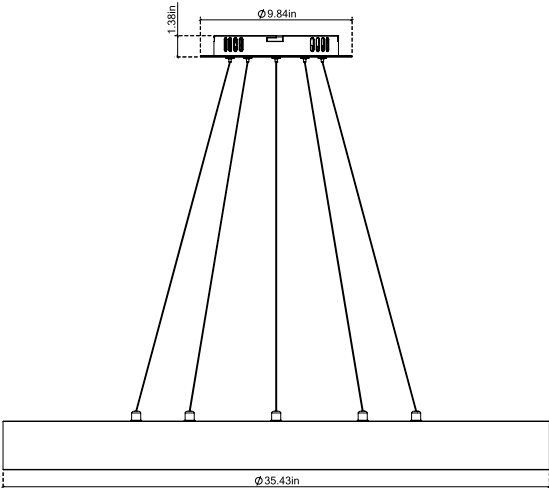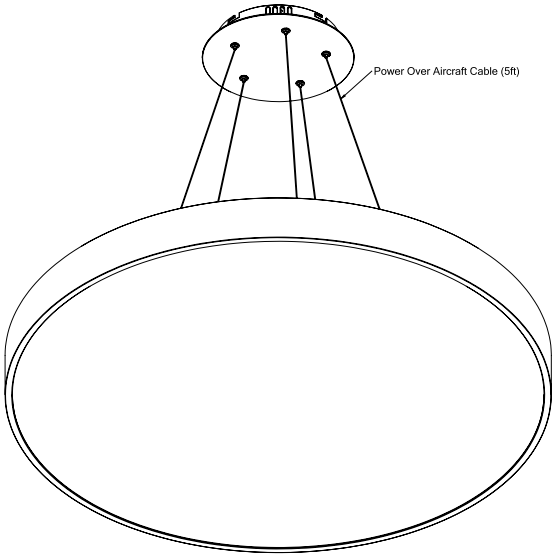


TECHOLED-MS-DI-47-150

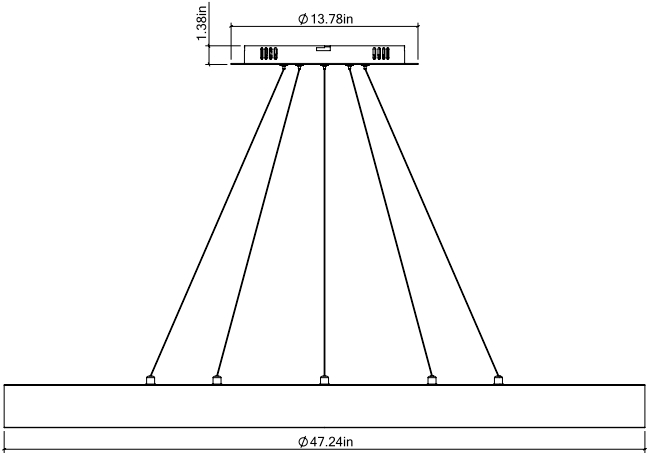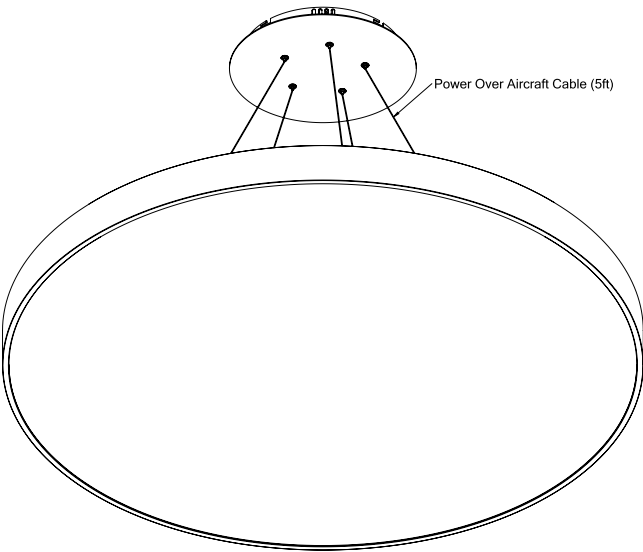


Project:	Type:
	Comments:


Photometrics




TECHOLED-MS-DI-18-LO-30




TECHOLED-MS-DI-18-ME-30




TECHOLED-MS-DI-18-HI-30




TECHOLED-MS-DI-23-LO-30




TECHOLED-MS-DI-23-ME-30




TECHOLED-MS-DI-23-HI-30




TECHOLED-MS-DI-35-LO-30




TECHOLED-MS-DI-35-ME-30




TECHOLED-MS-DI-35-HI-30



TECHOLED-MS-DI-47-LO-30



TECHOLED-MS-DI-47-ME-30




TECHOLED-MS-DI-47-HI-30

Project:	Type:
	Comments:

Finish Details (powder coat finish)

■ Standard Colors



W – White



S – Silver



B – Black

■ Custom Colors



RAL 1003



RAL 2004



RAL 3000



RAL 4001



RAL 5002



RAL 6000



RAL 6038



RAL 7001



RAL 1036




RAL 8029

Any RAL color available, please refer to ralcolorchart.com

■ Custom Wooden Colors



American Walnut



Cherry



Maple



Light Oak




Palisander Santos


Project:	Type:
	Comments:

 Color Temperature


 Color Temperature




2700K




3000K



3500K




4000K




5000K

 Tunable White



Dim To Warm



Tunable White